

Quest 2015 AMP Specification Sheet

Technical Specifications

Axle to Axle;	32 1-/4" (+/- 1/8")	Cable Guard Rod Length;	7.75"
Timing;	See Pic#1	Top Cam Spacers;	.175"- cable side/.140"-string side
Limb Deflection:	#77	Bottom Cam Spacers;	.050"- cable side/.030"- string side
Brace Height;	7"	String Stop Assembly;	W-000508
Let-off;	75% per setting below	Limb Rocker;	R-000027(blue)


Cam System

RAD Cam (draw lengths are minus nothing, plus 1/4")

Mod Position	Draw Stop Position	Draw Length	ATA RATING
#1	1	31"	up to 344
#2	2	30.5"	up to 342
#3	3	30"	up to 340
#4	4	29.5"	up to 335
#5	5	29"	up to 330
#6	6	28.5"	up to 325
#7	7	28"	up to 320
#8	8	27.5"	up to 315
#9	9	27"	up to 310
#10	10	26.5"	up to 305

String Specifications

Serving Locations								Overall Length
String	15 1/8"	26 5/16"	29 13/16"	33 9/16"	35 5/16"	42 15/16"	-	58 1/16"
Power Cable	2"	7"	8"	27 1/4"	-	-	-	34 1/8"
Control Cable	5"	27 1/4"	-	-	-	-	-	35 15/16"

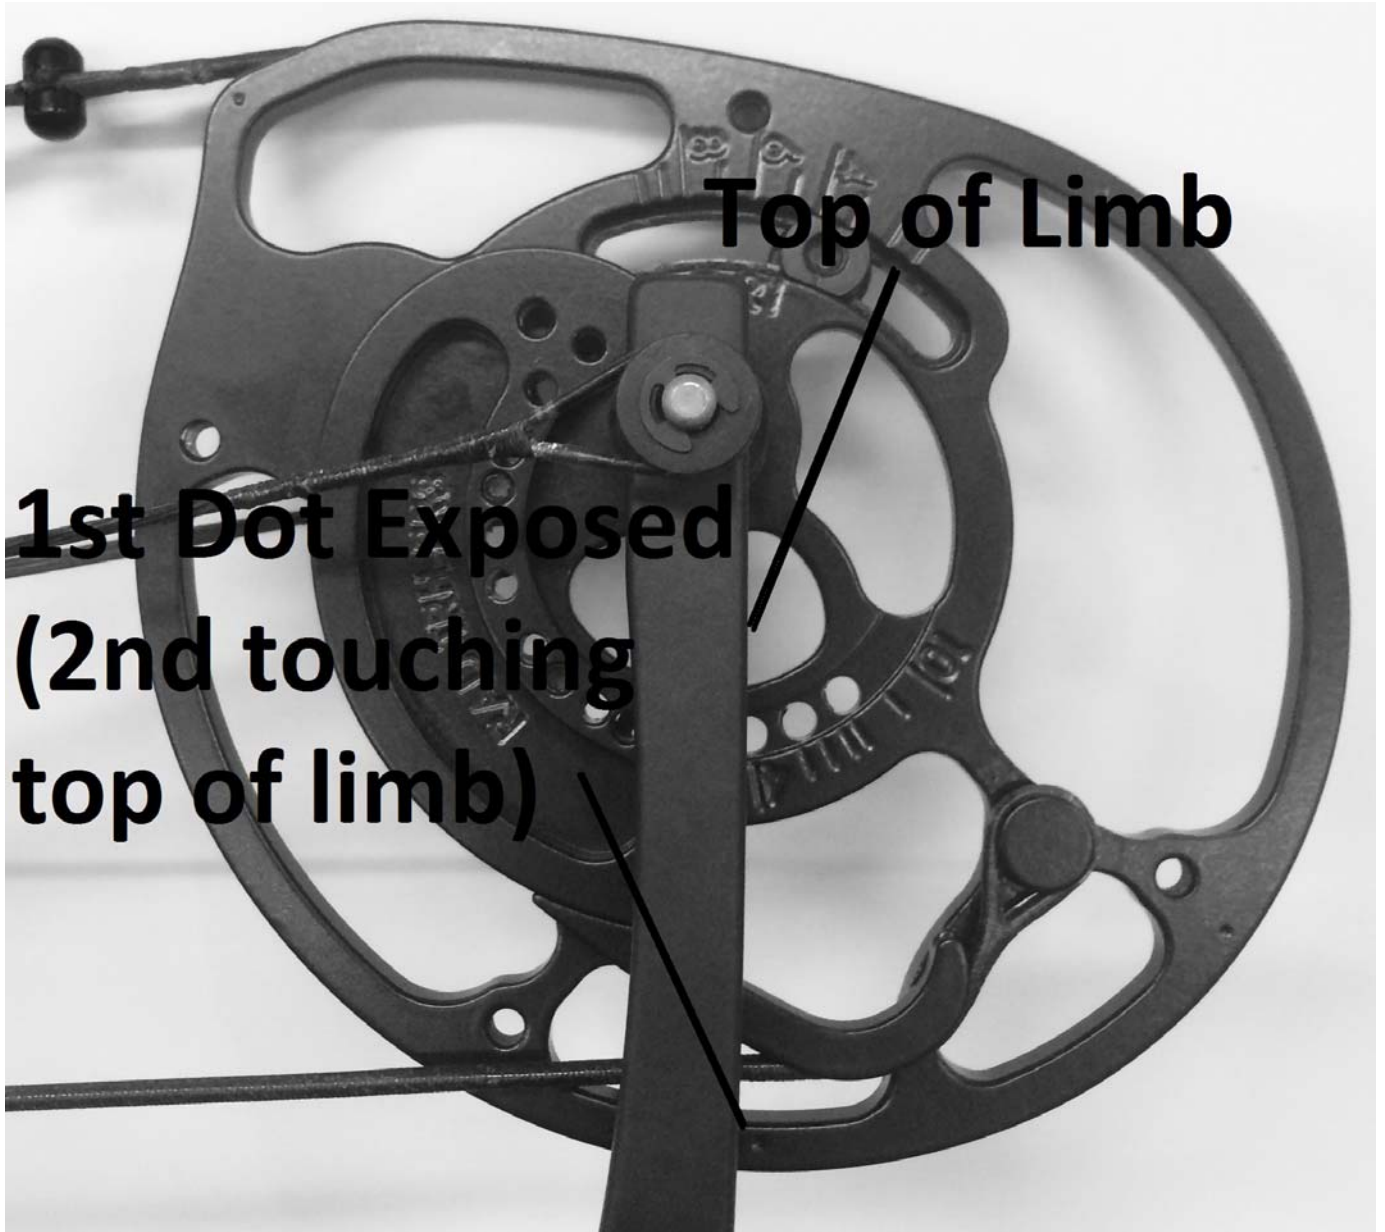

PIC #1