

Quest 2015 Storm Specification Sheet

Technical Specifications

Axle to Axle;	31.125" (+/- 1/8")	Cable Guard Rod Length;	7.75"
Timing;	See Pic#1	Top Idler Spacers;	.185" (+/- .005" to fit)
Limb Deflection:	#87	Bottom Cam Spacers;	.200" on cable side/.040"on string side
Brace Height;	7"	String Stop Assembly;	W-000508
Letoff;	85-70%	Limb Rocker;	R-000027(blue)


Cam System

Fluid SD Cam (draw lengths are minus nothing, plus 1/4")

Mod Position	Draw Stop Position	Draw Length		ATA RATING
		MOD A	MOD B	
#1	#1	-	27.5	295-290
#2	#2	27	-	290-285
#3	#3	-	26.5	285-280
#4	#4	26	-	280-275
#5	#5	-	25.5	275-270
#6	#6	25	-	270-265
#7	#7	-	24.5	265-260
#8	#8	24	-	260-255
#9	#9	-	23.5	255-250
#10	#10	23	-	250-245

String Specifications

Serving Locations									Overall Length
String	14 3/4"	20 1/2"	22 1/2"	26 1/8"	29 3/4"	40 3/4"	58"	76 7/8"	86 3/8"
Cable	2"	26 1/8"	-	-	-	-	-	-	33 3/8"

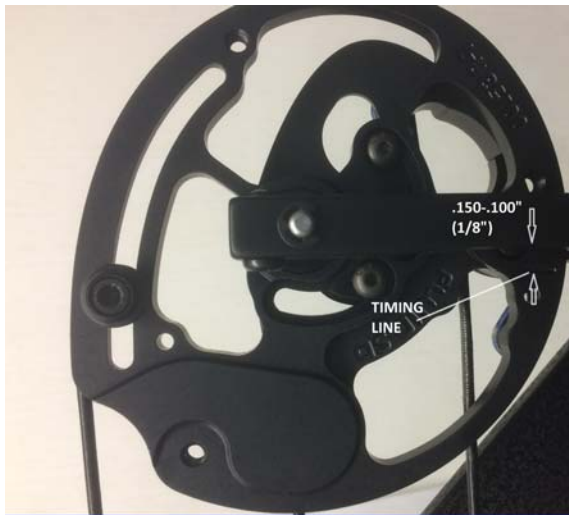

Pic#1

